


www.multitronix.com

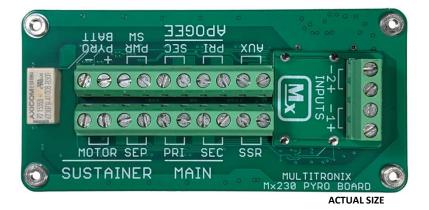

The Mx230 Pyro Board plugs onto the backside of an Mx210 transmitter and adds deployment and staging capability. All events can be fired with GPS precision even at altitudes that reach into space.

- Seven pyro channels and one solid state relay output
- Unlimited GPS altitude capability
- GPS and gyro tilt lockout for safe staging
- Power-on and arming are done remotely for added safety
- > Built-in safety shunt for sustainer motor igniter
- Deployments can be triggered by GPS, accelerometer, barometric pressure, timer or manual command
- Staging can be triggered based on a flexible combination of GPS, gyro, accelerometer and timer criteria
- All events can be configured with the receiver no computer needed
- Simple user interface for launch setup with an interactive electronic Go/No-Go checklist on the receiver
- > Continuity and event data transmitted to the ground

- Two general purpose inputs for monitoring external events
- External pyro battery can be LiPo or 9V types
- Reverse battery polarity protected
- Each pyro channel has an electronic 15 Amp current limit
- Each pyro channel has built-in thermal and ESD protection
- All channels are opto-isolated from the transmitter board
- Firing circuit has both high side and low side power FETs for added safety
- Self-test performed at power-up

Multiple Configurations Available



Mx230

Option-11

2.7" x 4.0"

\$1155



Mx230 Option-20 2.7" x 12.8" \$1250

Option-1 is for upgrading an existing Mx210 Kate-3 or Mx150 Kate-2 transmitter.

Options 10, 11, 20 and 30 include an Mx210 transmitter mounted on the back side.

Option-10 fits inside a 2" ID tube and has an aft bulkhead with an attachment bracket for a recovery harness.

Options 11, 20 and 30 are sled mounted.



Mx230 Option-10 1.9" x 16.1" \$1275 Mx230 Option-30 2.7" x 16.1" \$1275



Multitronix www.multitronix.com