




TelemetryPro™ Transmitter

Recommended Mounting Scheme

The transmitter is designed to be mounted inside a standard 54mm phenolic tube. Phenolic coupler tubes above and below it should be used to hold it in place within the main tube. For best results, it should be mounted in the nosecone. It **must** be mounted with the GPS facing up. This is required for proper operation of the GPS and the accelerometer.

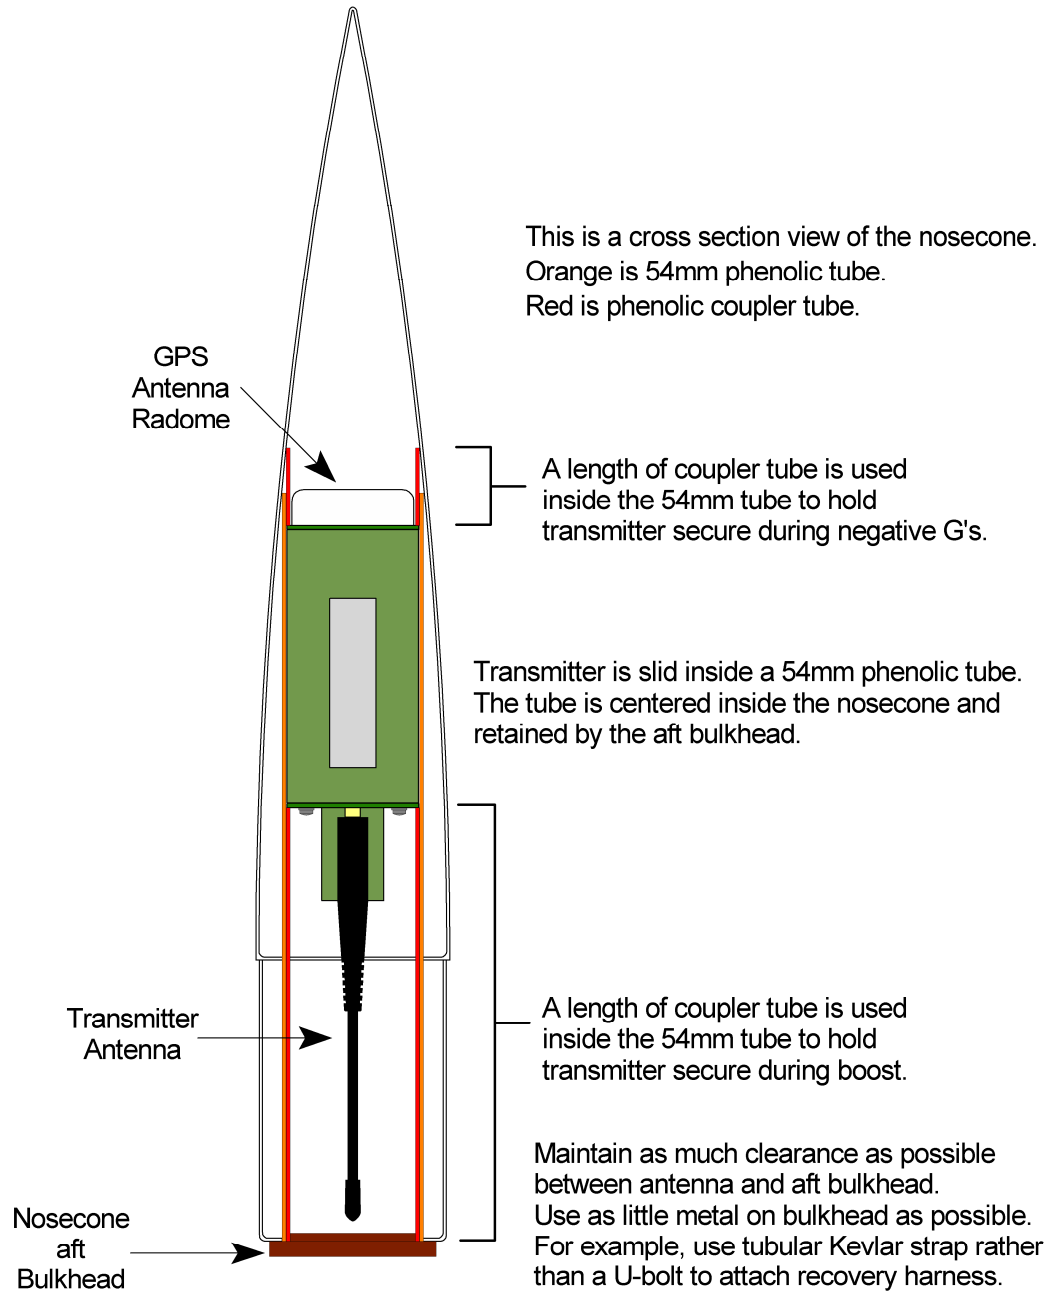

Multitronix LLC
www.multitronix.com

For more information visit our website or
email: info@multitronix.com